

CONTROLLER ASSEMBLIES

BASELINE™ BASESTATION 1000 CONTROLLER ASSEMBLY

The Imperial Controller Assembly (ICA) is built with the highest quality standards using UL Listed stainless steel enclosures to provide simple and efficient installations in the field. All Assemblies include a pre-installed controller(s), 120VAC receptacles, terminal boards for wiring and mounting instructions. The Imperial Assemblies wiring harness is wired through the rear giving it a clean look.

As pre-assembled and pre-wired for convenience, the installer is responsible for setting the enclosure base (or Mounting Pad), installing conduits, wiring the 120VAC electrical to the receptacle, and connecting the valve wires to the terminal board. Optional flow, rain, and other sensing devices may also be connected to the terminal board.

Mounting bases (#MP) are ideal way to further reduce installation time by eliminating the need to a pour concrete base. All Imperial Assemblies include a limited 5 year warranty.



SPECIFICATIONS


The Imperial Controller Assembly shall include a UL Listed stainless steel vandal resistant enclosure with a removable backboard, 120VAC outlet receptacle, and terminal wire board with Remote Receiver Connector (RRC).

The electrical junction box shall include an on/off power switch and duplex receptacle with ground fault interrupt circuit.

The terminal wiring board shall be pre-mounted and wired through the rear side of the backboard and shall include screw-less cage-type terminal block connections including up to two slots per terminal and may accept 12 or 14 gauge AWG wires. The terminal board shall also include a reset-able fuse and sensor bypass switch.

The terminal board(s) shall have a maximum of forty eight (48) valve station locations including additional terminals for up to four (4) common wires, master valve(s), two (2) rain sensor terminals, pump start, flow sensor, and two-wire communication cables.

STRONG BOX ENCLOSURE TYPES

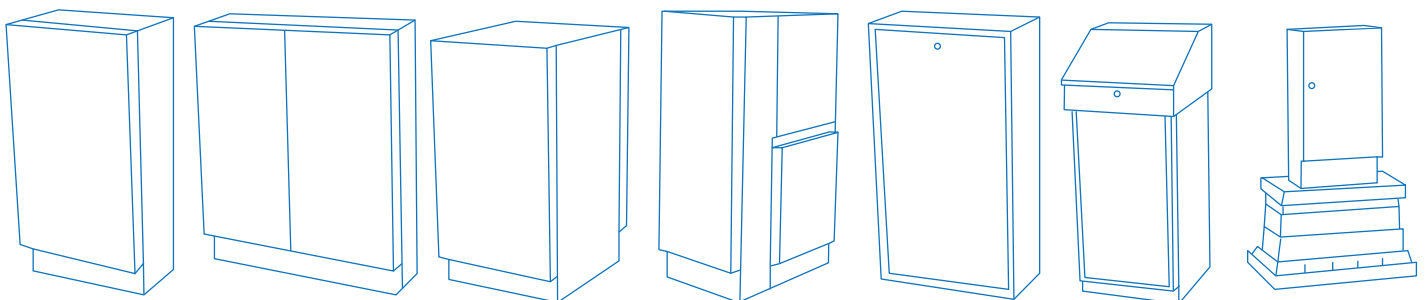

FRONT ENTRY

SIDE BY SIDE

DOUBLE WIDE

METER CONTROLLER

LITE CONTROLLER

TOP ENTRY

MOUNTING PAD

BASELINE™ BASESTATION 1000 CONTROLLER ASSEMBLY PART NUMBERING GUIDE

Imperial Controller Assembly Part Number

ICAX-BL1-XX+XX/Options

ICAX- Specify Strong Box Stainless Steel Enclosure Type

FRONT ENTRY

1=	18"W x 36"H x 12"D	SB18-SS PEDESTAL
2=	18"W x 36"H x 24"D	SB18D-SS PEDESTAL
3=	24"W x 36"H x 12"D	SB24-SS PEDESTAL
4=	24"W x 36"H x 24"D	SB24D-SS PEDESTAL
8=	36"W x 36"H x 12"D	SB36-SS PEDESTAL

ELECTRIC METER/ CONTROLLER ENCLOSURE

5A=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/100 AMP – 1 PH)
5B=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/150 AMP – 1 PH)
5C=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/200 AMP – 1 PH)
5D=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/100 AMP – 3 PH)
5E=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(200/200 AMP – 3 PH)

TOP ENTRY ENCLOSURES

6=	16"W x 38"H x 15.5"D	SB-16SS PEDESTAL
7=	24"W x 38"H x 17"D	SB-22SS PEDESTAL

WALL MOUNT ENCLOSURES AND BACKBOARDS

10=	16"W x 32"H	BACKBOARD – WALL MOUNT
11=	22"W x 32"H	BACKBOARD – WALL MOUNT
16=	18"W x 36"H x 12"D	SB-18SSW WALL MOUNT ENCLOSURE
17=	24"W x 36"H x 12"D	SB-24SSW WALL MOUNT ENCLOSURE

LITE DUTY ENCLOSURES

12=	16.75"W x 30"H x 8.25"D	LD-16SW WALL MOUNT
13=	16.75"W x 30"H x 8.25"D	LD-16SSW PEDESTAL
15=	17 1/2"W x 34 1/2"H x 11 1/2"D	LD-16 TOP ENTRY PEDESTAL

BLX-XX+XX /OPTIONS

BLX	CONTROLLER MANUFACTURER BL = BASELINE
BL1	SATELLITE TYPE/COMMUNICATION 1 = BL1000 2 = BL3200 3 = BL3200SS (SubStation) 4 = BL3200FS (FlowStation)
XX	CONTROLLER #1 - STATION QUANTITY (12-48 Conventional; 100 Decoder)
+XX	CONTROLLER #2 - STATION QUANTITY (12-48 Conventional; 100 Decoder) If applicable
/OPTIONS	CONTROLLER OPTIONS (See Controller Assembly Options Section for available options)

CONTROLLER ASSEMBLIES

BASELINE™ BASESTATION 3200 CONTROLLER ASSEMBLY

The Imperial Controller Assembly (ICA) is built with the highest quality standards using UL Listed stainless steel enclosures to provide simple and efficient installations in the field. All Assemblies include a pre-installed controller(s), 120VAC receptacles, terminal boards for wiring and mounting instructions. The Imperial Assemblies wiring harness is wired through the rear giving it a clean look.

As pre-assembled and pre-wired for convenience, the installer is responsible for setting the enclosure base (or Mounting Pad), installing conduits, wiring the 120VAC electrical to the receptacle, and connecting the valve wires to the terminal board. Optional flow, rain, and other sensing devices may also be connected to the terminal board.

Mounting bases (#MP) are ideal way to further reduce installation time by eliminating the need to a pour concrete base. All Imperial Assemblies include a limited 5 year warranty.



SPECIFICATIONS


The Imperial Controller Assembly shall include a UL Listed stainless steel vandal resistant enclosure with a removable backboard, 120VAC outlet receptacle, and terminal wire board with Remote Receiver Connector (RRC).

The electrical junction box shall include an on/off power switch and duplex receptacle with ground fault interrupt circuit.

The terminal wiring board shall be pre-mounted and wired through the rear side of the backboard and shall include screw-less cage-type terminal block connections including up to two slots per terminal and may accept 12 or 14 gauge AWG wires. The terminal board shall also include a reset-able fuse and sensor bypass switch.

The terminal board(s) shall have a maximum of forty eight (48) valve station locations including additional terminals for up to four (4) common wires, master valve(s), two (2) rain sensor terminals, pump start, flow sensor, and two-wire communication cables.

STRONG BOX ENCLOSURE TYPES

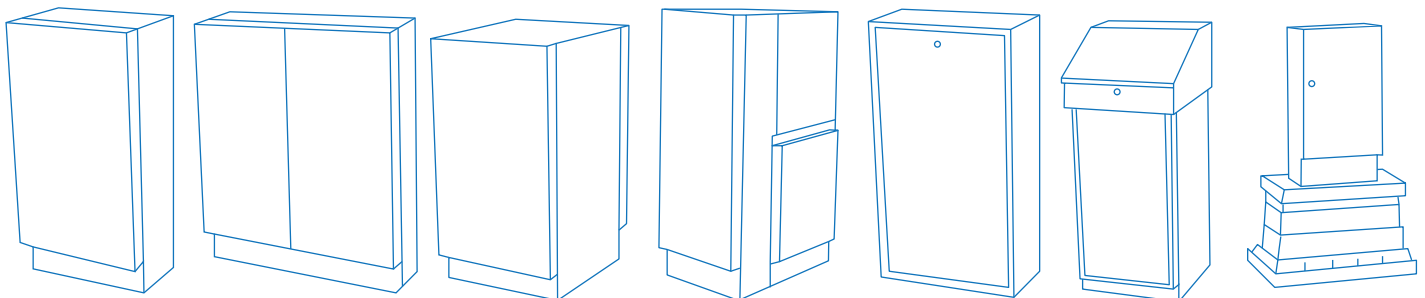

FRONT ENTRY

SIDE BY SIDE

DOUBLE WIDE

METER CONTROLLER

LITE CONTROLLER

TOP ENTRY

MOUNTING PAD

BASELINE™ BASESTATION 3200 CONTROLLER ASSEMBLY PART NUMBERING GUIDE

Imperial Controller Assembly Part Number

ICAX-BL2-XX+XX/Options

ICAX- Specify Strong Box Stainless Steel Enclosure Type

FRONT ENTRY		
1=	18"W x 36"H x 12"D	SB18-SS PEDESTAL
2=	18"W x 36"H x 24"D	SB18D-SS PEDESTAL
3=	24"W x 36"H x 12"D	SB24-SS PEDESTAL
4=	24"W x 36"H x 24"D	SB24D-SS PEDESTAL
8=	36"W x 36"H x 12"D	SB36-SS PEDESTAL

ELECTRIC METER/ CONTROLLER ENCLOSURE			
5A=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/100 AMP – 1 PH)
5B=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/150 AMP – 1 PH)
5C=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/200 AMP – 1 PH)
5D=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/100 AMP – 3 PH)
5E=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(200/200 AMP – 3 PH)

TOP ENTRY ENCLOSURES		
6=	16"W x 38"H x 15.5"D	SB-16SS PEDESTAL
7=	24"W x 38"H x 17"D	SB-22SS PEDESTAL

WALL MOUNT ENCLOSURES AND BACKBOARDS		
10=	16"W x 32"H	BACKBOARD – WALL MOUNT
11=	22"W x 32"H	BACKBOARD – WALL MOUNT
16=	18"W x 36"H x 12"D	SB-18SSW WALL MOUNT ENCLOSURE
17=	24"W x 36"H x 12"D	SB-24SSW WALL MOUNT ENCLOSURE

LITE DUTY ENCLOSURES		
12=	16.75"W x 30"H x 8.25"D	LD-16SW WALL MOUNT
13=	16.75"W x 30"H x 8.25"D	LD-16SSW PEDESTAL
15=	17 1/2"W x 34 1/2"H x 11 1/2"D	LD-16 TOP ENTRY PEDESTAL

BLX-XX+XX /OPTIONS

BLX	CONTROLLER MANUFACTURER BL = BASELINE
BL2	SATELLITE TYPE/COMMUNICATION 1 = BL1000 2 = BL3200 3 = BL3200SS (SubStation) 4 = BL3200FS (FlowStation)
XX	CONTROLLER #1 - STATION QUANTITY (12-48 Conventional; 200 Decoder)
+XX	CONTROLLER #2 - STATION QUANTITY (12-48 Conventional; 200 Decoder) If applicable
/OPTIONS	CONTROLLER OPTIONS (See Controller Assembly Options Section for available options)

CONTROLLER ASSEMBLIES

BASELINE™ 3200 SUBSTATION CONTROLLER ASSEMBLY

The Imperial Controller Assembly (ICA) is built with the highest quality standards using UL Listed stainless steel enclosures to provide simple and efficient installations in the field. All Assemblies include a pre-installed controller(s), 120VAC receptacles, terminal boards for wiring and mounting instructions. The Imperial Assemblies wiring harness is wired through the rear giving it a clean look.

As pre-assembled and pre-wired for convenience, the installer is responsible for setting the enclosure base (or Mounting Pad), installing conduits, wiring the 120VAC electrical to the receptacle, and connecting the valve wires to the terminal board. Optional flow, rain, and other sensing devices may also be connected to the terminal board.

Mounting bases (#MP) are ideal way to further reduce installation time by eliminating the need to a pour concrete base. All Imperial Assemblies include a limited 5 year warranty.



SPECIFICATIONS


The Imperial Controller Assembly shall include a UL Listed stainless steel vandal resistant enclosure with a removable backboard, 120VAC outlet receptacle, and terminal wire board with Remote Receiver Connector (RRC).

The electrical junction box shall include an on/off power switch and duplex receptacle with ground fault interrupt circuit.

The terminal wiring board shall be pre-mounted and wired through the rear side of the backboard and shall include screw-less cage-type terminal block connections including up to two slots per terminal and may accept 12 or 14 gauge AWG wires. The terminal board shall also include a reset-able fuse and sensor bypass switch.

The terminal board(s) shall have a maximum of forty eight (48) valve station locations including additional terminals for up to four (4) common wires, master valve(s), two (2) rain sensor terminals, pump start, flow sensor, and two-wire communication cables.

STRONG BOX ENCLOSURE TYPES

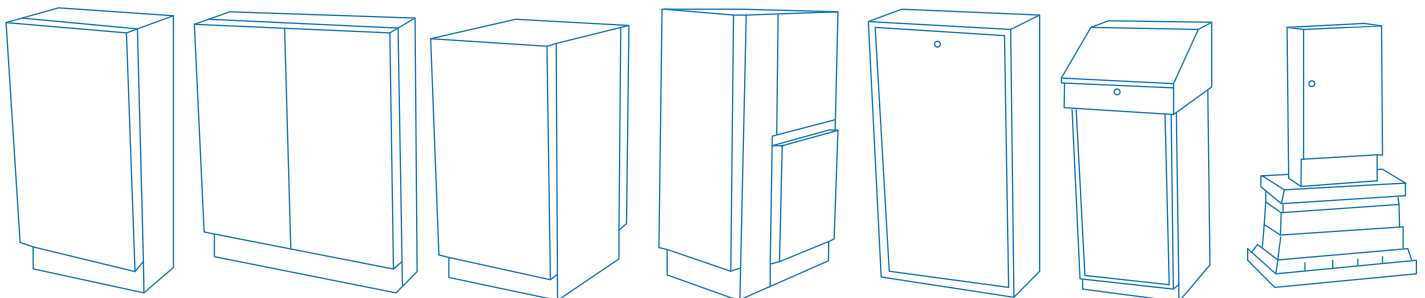

FRONT ENTRY

SIDE BY SIDE

DOUBLE WIDE

METER CONTROLLER

LITE CONTROLLER

TOP ENTRY

MOUNTING PAD

BASELINE™ 3200 SUBSTATION CONTROLLER ASSEMBLY PART NUMBERING GUIDE

Imperial Controller Assembly Part Number

ICAX-BL3-XX+XX/Options

ICAX- Specify Strong Box Stainless Steel Enclosure Type

FRONT ENTRY

1=	18"W x 36"H x 12"D	SB18-SS PEDESTAL
2=	18"W x 36"H x 24"D	SB18D-SS PEDESTAL
3=	24"W x 36"H x 12"D	SB24-SS PEDESTAL
4=	24"W x 36"H x 24"D	SB24D-SS PEDESTAL
8=	36"W x 36"H x 12"D	SB36-SS PEDESTAL

ELECTRIC METER/ CONTROLLER ENCLOSURE

5A=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/100 AMP – 1 PH)
5B=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/150 AMP – 1 PH)
5C=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/200 AMP – 1 PH)
5D=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/100 AMP – 3 PH)
5E=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(200/200 AMP – 3 PH)

TOP ENTRY ENCLOSURES

6=	16"W x 38"H x 15.5"D	SB-16SS PEDESTAL
7=	24"W x 38"H x 17"D	SB-22SS PEDESTAL

WALL MOUNT ENCLOSURES AND BACKBOARDS

10=	16"W x 32"H	BACKBOARD – WALL MOUNT
11=	22"W x 32"H	BACKBOARD – WALL MOUNT
16=	18"W x 36"H x 12"D	SB-18SSW WALL MOUNT ENCLOSURE
17=	24"W x 36"H x 12"D	SB-24SSW WALL MOUNT ENCLOSURE

LITE DUTY ENCLOSURES

12=	16.75"W x 30"H x 8.25"D	LD-16SW WALL MOUNT
13=	16.75"W x 30"H x 8.25"D	LD-16SSW PEDESTAL
15=	17 1/2"W x 34 1/2"H x 11 1/2"D	LD-16 TOP ENTRY PEDESTAL

BLX-XX+XX /OPTIONS

BLX	CONTROLLER MANUFACTURER BL = BASELINE
BL3	SATELLITE TYPE/COMMUNICATION 1 = BL1000 2 = BL3200 3 = BL3200SS (SubStation) 4 = BL3200FS (FlowStation)
XX	CONTROLLER #1 - STATION QUANTITY (Up to 200 zones off of a BL3200 BaseStation)
+XX	CONTROLLER #2 - STATION QUANTITY (Up to 200 zones off of a BL3200 BaseStation)
/OPTIONS	CONTROLLER OPTIONS (See Controller Assembly Options Section for available options)

CONTROLLER ASSEMBLIES

BASELINE™ 3200 FLOWSTATION CONTROLLER ASSEMBLY

The Imperial Controller Assembly (ICA) is built with the highest quality standards using UL Listed stainless steel enclosures to provide simple and efficient installations in the field. All Assemblies include a pre-installed controller(s), 120VAC receptacles, terminal boards for wiring and mounting instructions. The Imperial Assemblies wiring harness is wired through the rear giving it a clean look.

As pre-assembled and pre-wired for convenience, the installer is responsible for setting the enclosure base (or Mounting Pad), installing conduits, wiring the 120VAC electrical to the receptacle, and connecting the valve wires to the terminal board. Optional flow, rain, and other sensing devices may also be connected to the terminal board.

Mounting bases (#MP) are ideal way to further reduce installation time by eliminating the need to a pour concrete base. All Imperial Assemblies include a limited 5 year warranty.



SPECIFICATIONS


The Imperial Controller Assembly shall include a UL Listed stainless steel vandal resistant enclosure with a removable backboard, 120VAC outlet receptacle, and terminal wire board with Remote Receiver Connector (RRC).

The electrical junction box shall include an on/off power switch and duplex receptacle with ground fault interrupt circuit.

The terminal wiring board shall be pre-mounted and wired through the rear side of the backboard and shall include screw-less cage-type terminal block connections including up to two slots per terminal and may accept 12 or 14 gauge AWG wires. The terminal board shall also include a reset-able fuse and sensor bypass switch.

The terminal board(s) shall have a maximum of forty eight (48) valve station locations including additional terminals for up to four (4) common wires, master valve(s), two (2) rain sensor terminals, pump start, flow sensor, and two-wire communication cables.

STRONG BOX ENCLOSURE TYPES

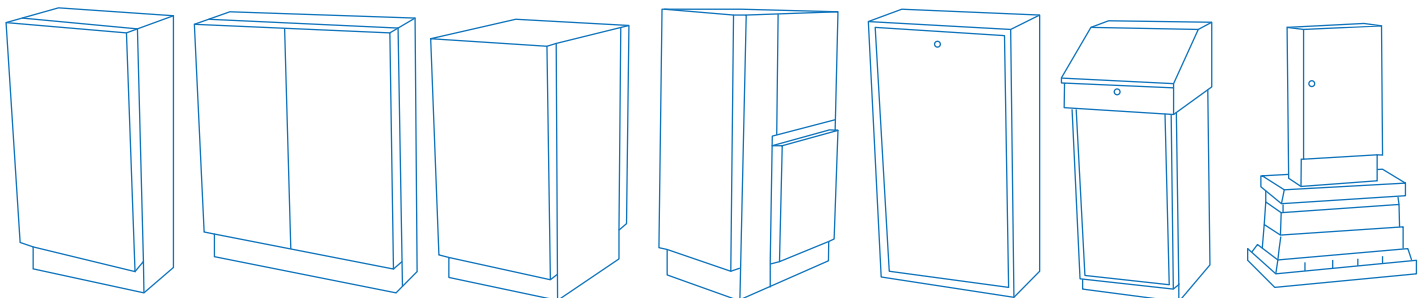

FRONT ENTRY

SIDE BY SIDE

DOUBLE WIDE

METER CONTROLLER

LITE CONTROLLER

TOP ENTRY

MOUNTING PAD

BASELINE™ 3200 FLOWSTATION CONTROLLER ASSEMBLY PART NUMBERING GUIDE

Imperial Controller Assembly Part Number

ICAX-BL4-XX+XX/Options

ICAX- Specify Strong Box Stainless Steel Enclosure Type

FRONT ENTRY

1=	18"W x 36"H x 12"D	SB18-SS PEDESTAL
2=	18"W x 36"H x 24"D	SB18D-SS PEDESTAL
3=	24"W x 36"H x 12"D	SB24-SS PEDESTAL
4=	24"W x 36"H x 24"D	SB24D-SS PEDESTAL
8=	36"W x 36"H x 12"D	SB36-SS PEDESTAL

ELECTRIC METER/ CONTROLLER ENCLOSURE

5A=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/100 AMP – 1 PH)
5B=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/150 AMP – 1 PH)
5C=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/200 AMP – 1 PH)
5D=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(100/100 AMP – 3 PH)
5E=	18"W x 52"H x 20"D + 18"W x 52"H	SB-1852SS PEDESTAL	(200/200 AMP – 3 PH)

TOP ENTRY ENCLOSURES

6=	16"W x 38"H x 15.5"D	SB-16SS PEDESTAL
7=	24"W x 38"H x 17"D	SB-22SS PEDESTAL

WALL MOUNT ENCLOSURES AND BACKBOARDS

10=	16"W x 32"H	BACKBOARD – WALL MOUNT
11=	22"W x 32"H	BACKBOARD – WALL MOUNT
16=	18"W x 36"H x 12"D	SB-18SSW WALL MOUNT ENCLOSURE
17=	24"W x 36"H x 12"D	SB-24SSW WALL MOUNT ENCLOSURE

LITE DUTY ENCLOSURES

12=	16.75"W x 30"H x 8.25"D	LD-16SW WALL MOUNT
13=	16.75"W x 30"H x 8.25"D	LD-16SSW PEDESTAL
15=	17 1/2"W x 34 1/2"H x 11 1/2"D	LD-16 TOP ENTRY PEDESTAL

BLX-XX+XX /OPTIONS

BLX	CONTROLLER MANUFACTURER BL = BASELINE
BL4	SATELLITE TYPE/COMMUNICATION 1 = BL1000 2 = BL3200 3 = BL3200SS (SubStation) 4 = BL3200FS (FlowStation)
XX	CONTROLLER #1 - STATION QUANTITY (FLOW ONLY)*
/OPTIONS	CONTROLLER OPTIONS (See Controller Assembly Options Section for available options)

* Note: A FlowStation must communicate to a BL3200 BaseStation Controller. Allows up to 30 BaseStation 3200 Controllers to share up to 20 points of connection on a single 3200FS FlowStation. Please contact your I.T.S. representative for clarification of specific equipment requirements